




Brida de Cuello para Soldar DIN 2631.

Presión Nominal 6.

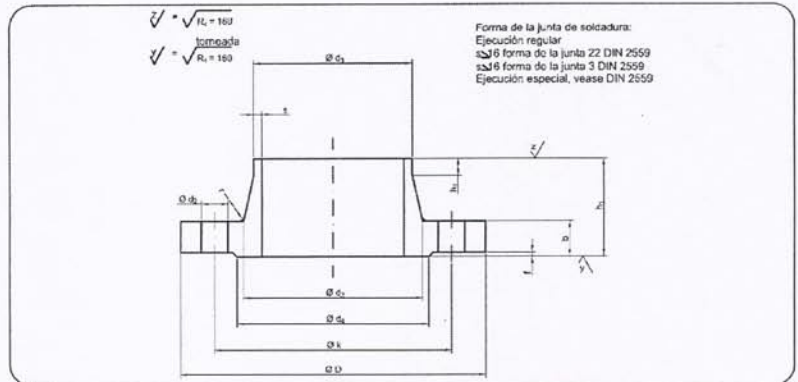

Paso Nominal	Medidas de Acoplamiento del Tubo		Dimensiones de Brida				Cuello				Moldura de Junta		Taladros			Peso por Brida Kg. »
	d ₁		D	b	k	h ₁	d ₂	s	r	h ₂ »	d ₃	f	Número	Rosca	d ₄	
10	-	14.0	75	12	50	28	22	1.8	4	6	35	2	4	M 10	11	0.34
15	17.2	20.0	80	12	55	30	28	2.0	4	6	40	2	4	M 10	11	0.39
20	21.3	25.0	90	14	65	32	35	2.3	4	6	50	2	4	M 10	11	0.59
25	26.9	30.0	100	14	75	35	40	2.6	4	6	60	2	4	M 10	11	0.75
32	33.7	38.0	120	14	90	35	50	2.6	6	6	70	2	4	M 12	14	1.05
40	42.4	44.5	130	14	100	38	58	2.6	6	7	80	3	4	M 12	14	1.18
50	48.3	57.0	140	14	110	38	70	2.9	6	8	90	3	4	M 12	14	1.34
65	60.3	-	160	14	130	38	88	2.9	6	9	110	3	4	M 12	14	1.67
80	76.1	-	190	16	150	42	102	3.2	8	10	128	3	4	M 16	18	2.71
100	88.9	108.0	210	16	170	45	122	3.6	8	10	148	3	4	M 16	18	3.24
125	114.3	133.0	240	18	200	48	148	4.0	8	10	178	3	8	M 16	18	4.49
150	139.7	159.0	265	18	225	48	172	4.5	10	12	202	3	8	M 16	18	5.15
200	168.3	-	320	20	280	55	236	5.9	10	15	258	3	8	M 16	18	7.78
250	219.1	267.0	375	22	335	60	282	6.3	12	15	312	3	12	M 16	18	10.8
300	273.0	-	440	22	395	62	342	7.1	12	15	365	4	12	M 20	22	14.0
350	323.9	368.0	490	22	445	62	385	7.1	12	15	415	4	12	M 20	22	18.5
400	355.6	-	540	22	495	55	438	7.1	12	15	465	4	16	M 20	22	19.0
500	406.4	419.0	645	24	600	68	538	7.1	12	15	570	4	20	M 20	22	28.8
600	508	-	755	24	705	70	640	7.1	12	16	670	5	20	M 24	26	31.5
700	610	-	860	24	810	70	740	7.1	12	16	775	5	24	M 24	26	37.4
800	711	-	975	24	920	70	842	7.1	12	16	880	5	24	M 27	30	46.1
900	813	-	1075	26	1020	70	942	7.1	12	16	980	5	24	M 27	30	55.6
1000	914	-	1175	26	1120	70	1045	7.1	16	16	1080	5	28	M 27	30	61.9
1200	1016	-	1405	28	1340	90	1248	8.0	16	20	1295	5	32	M 30	33	100
1400	1220	-	1630	32	1560	90	1452	8.0	16	20	1510	5	36	M 33	36	149
1600	1420	-	1830	34	1760	90	1855	9.0	16	20	1710	5	40	M 33	36	180
1800	1620	-	2045	36	1970	100	1855	10.0	16	20	1920	5	44	M 36	39	225
2000	1820	-	2265	38	2180	110	2058	11.0	16	25	2125	5	48	M 39	42	295
2200	2020	-	2475	42	2390	115	2260	12.0	18	25	2335	6	52	M 39	42	361
2400	2220	-	2685	44	2600	125	2462	13.0	18	25	2545	6	56	M 39	42	415
2600	2420	-	1905	46	2810	130	2665	14.0	18	25	2750	6	60	M 45	48	530
2800	2620	-	3115	48	3020	135	2865	15.0	18	30	2960	6	64	M 45	48	643
3000	2820	-	3315	50	3220	140	3068	16.0	18	30	3160	6	68	M 45	48	777
3200	3020	-	3525	54	3430	150	3272	16.0	20	30	3370	6	72	M 45	48	851
3400	3220	-	3735	56	3640	150	3475	18.0	20	35	3580	6	76	M 45	48	993
3600	3420	-	3970	60	3860	165	3678	18.0	20	35	3790	6	80	M 52	56	1001